



Disabled Refuge Call System LOOP or RADIAL (RS16 - RS64)

CDC/L/RS16 (Loop) or CDC/R/RS16 (Radial) Revision 3, 10th August 2009

The central is fitted with illuminated momentary push switches for each of the Refuge areas. When a call is requested the relevant indicator illuminates and the phone rings to attract the attention of an incoming call. The master handset is lifted and the illuminated switch pressed, thereby connecting the slave phone/hands free to the master. A normal duplex (phone) or semi duplex (loudspeaker) conversation can then take place. Replacing the handset cancels the call. Multiple calls are logged onto the control panel and taken at the discretion of the master. Up to 4 refuge areas can be spoken to at the same time.



Dimensions: -	
Surface Mounted	600mm (H) x 520mm (W) x 150mm (D)
Flush Mounted (Door protrudes 20mm) Flushing Bezel	600mm (H) x 520mm (W) x 130mm (D)
	650mm (H) x 570mm (W) x 2mm (D)

The system provides a simple means of connecting two locations with an independent telephone link, continuously monitored when not in use, and utilising a battery supported power supply, to allow compliance with the relevant sections of BS5839 Pt9 & BS9999.

Replacing both handsets resets the system.


Alternative configurations permit the inclusion of additional visual call status indicators, to allow both audible and visual 'calling' signals to be generated, with a further facility for 'call registered' indicators to be provided if required.

In a quiescent state, the system is monitored for power supply failure and line damage, in addition to handset removal. A volt free changeover contact is provided for remote fault reporting. The batteries are contained in the central unit.

There are two wiring configurations :-

- '2' Core (Enhanced Fire Rated) **RADIAL** is routed from the central unit to the slave location.
- or a '4' Core (Enhanced Fire Rated) **LOOP** is daisy chained around as below.

Typical schematic for a loop wired 16 line Disabled Refuge Call system

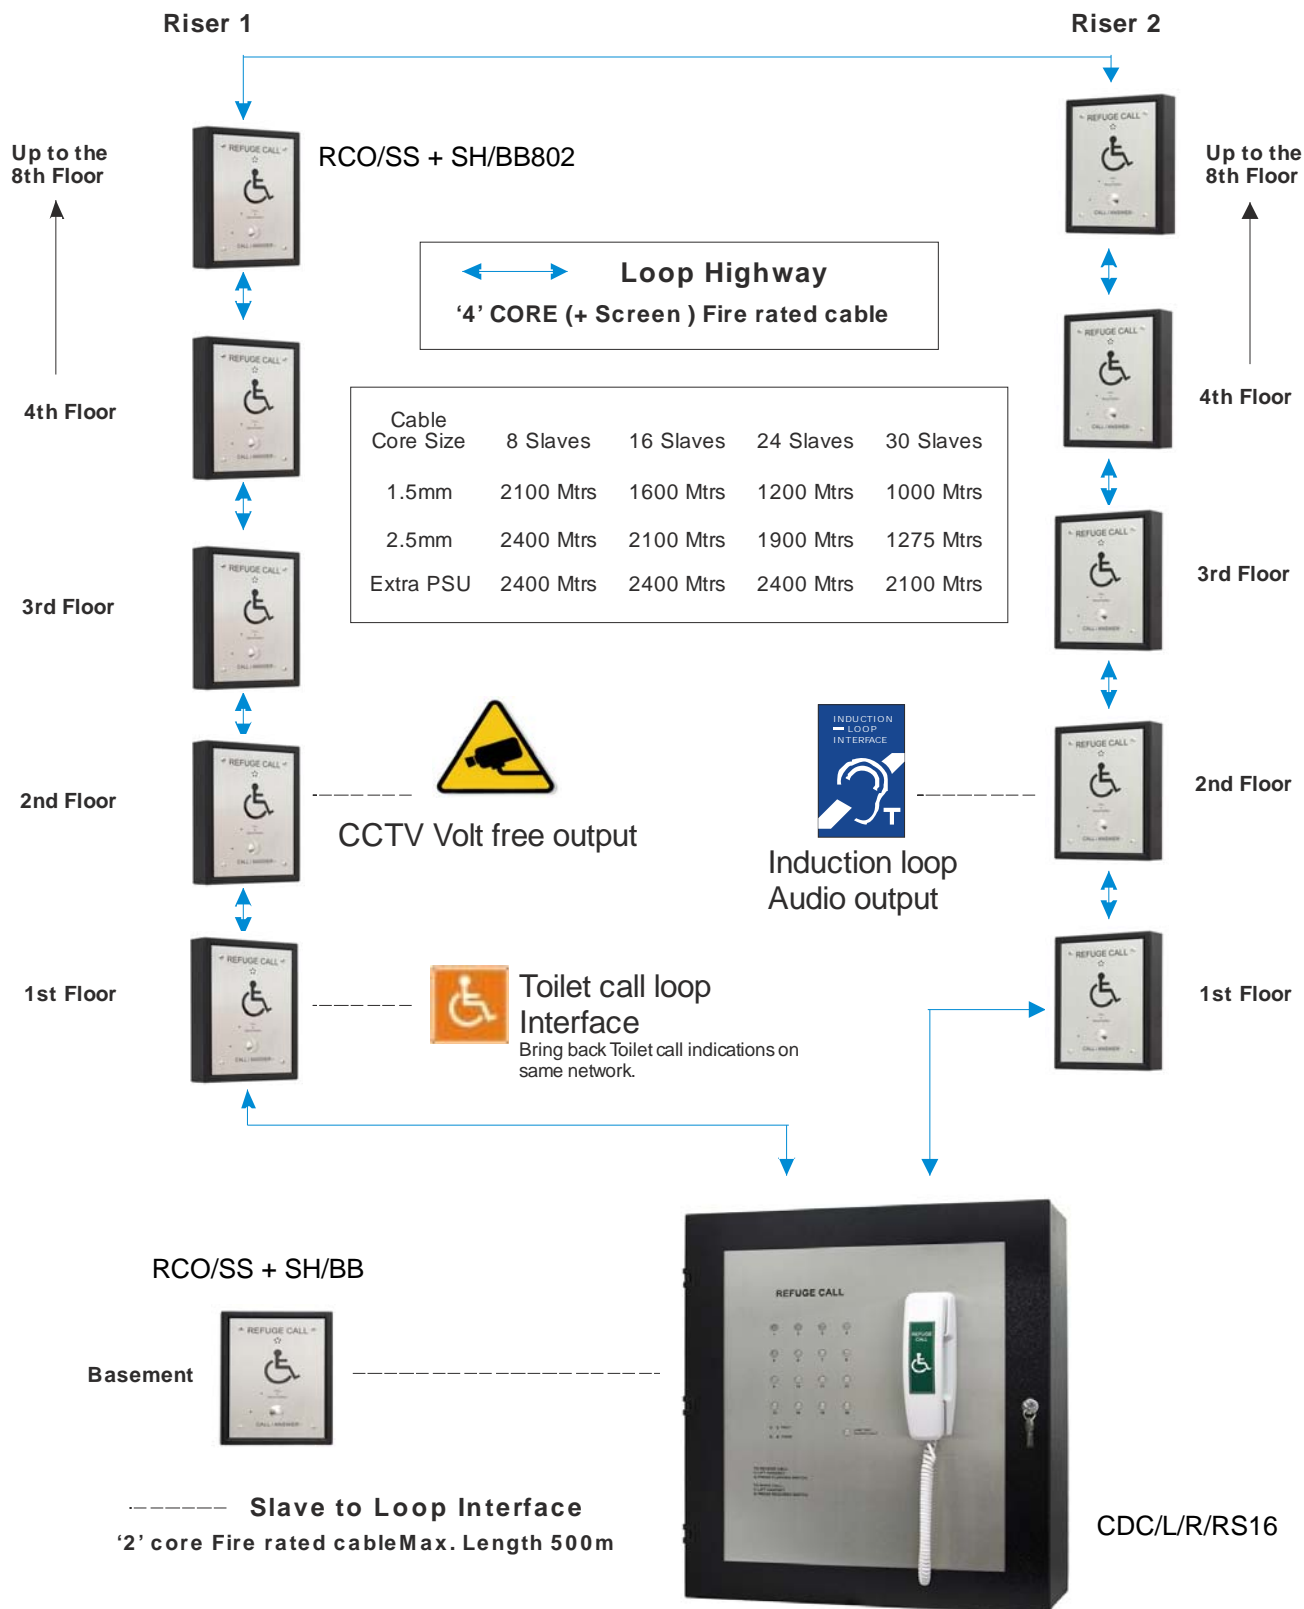

Cameo Systems Limited

29 Haviland Road, Ferndown Industrial Estate, Wimborne, Dorset, BH21 7SA
Tel : 01202 892088, Fax : 01202 861449

E-mail : sales@cameosystems.co.uk Web : www.cameosystems.co.uk